

Unframed

- ▶ Can be mounted flush with top of countertop or as a frameless installation
- ▶ Easy to clean black ceramic glass surface is resistance to scratching, staining, impact and heat – translucent surface allows you to see the glow of hot elements
- ▶ Illuminated touch controls with graduated control lighting
- ▶ Four ribbon-type radiant heating elements with six temperature zones
- ▶ Dual zone element radiant heaters for flexible cooking
- ▶ True Simmer setting on all elements
- ▶ Melt setting on one element
- ▶ Hot surface indicators on all elements
- ▶ Fast power cycles eliminate long durations of on/off cycles used to control cooking temperature
- ▶ Temperature limiter to ensure that safe operating temperature of glass ceramic is never exceeded
- ▶ Child safety lock key and universal off
- ▶ Certified by Star-K to meet religious regulations
- ▶ CSA certified for US and Canada
- ▶ Two and five year residential warranty – exclusions apply, see warranty




Model CT30EU

- ▶ *The Wolf Model CT30EU 30" (762) unframed electric cooktop with black ceramic glass surface can be mounted flush with top of countertop or as a frameless installation.*



This appliance is certified by Star-K to meet strict religious regulations in conjunction with specific instructions found on www.star-k.org.

▶ **Model CT30EU**

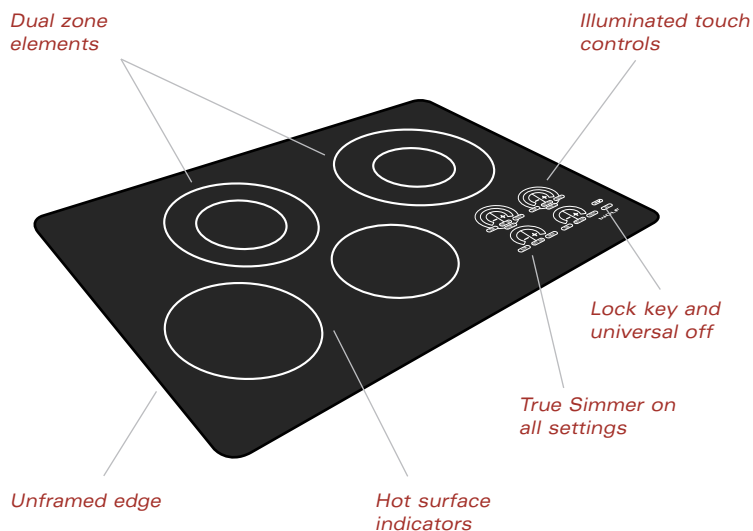

- ▶ *Dimensions in parentheses are in millimeters unless otherwise specified.*

Unframed

- ▶ The Wolf 30" (762) unframed electric cooktop can be mounted flush with the countertop or installed as a frameless application.
- ▶ Please follow the dimensions shown in the Pre-Installation Dimensions illustration.
- ▶ Refer to the Wolf Design Guide pdf file for detailed specifications.

SPECIFICATIONS

Overall Cooktop Width	30" (762)
Overall Cooktop Height	4" (102)
Overall Cooktop Depth	21" (533)
Cooktop Cut-out Width	28 ³ / ₈ " (721)
Cooktop Cut-out Depth	19 ³ / ₈ " (492)
Minimum Cabinet Depth	22 ³ / ₄ " (578)

Four Heating Elements with Six Zones

Two dual zone elements power (max) - 2,200W outer / 750W inner and 1,900W outer / 950W inner

Two single zone elements power (max) - 1,500W and 1,200W

Electrical Supply Requirements 240 V AC, 60 Hz, 40 amp dedicated circuit

Conduit 4 ft (1.2 m) flexible 3-wire


Total Connected Load 6.8 Kw at 240 V
5.2 Kw at 208 V

Shipping Weight 45 lbs (20 kg)

Special Note Wolf does not recommend the installation of a downdraft system with this cooktop


- ▶ Specifications are subject to change without notice.

OVERALL DIMENSIONS

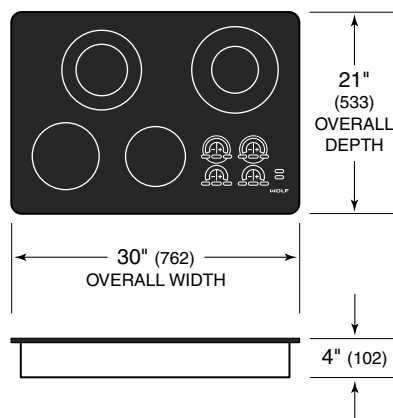

- ▶ Dimensions may vary by $\pm 1/8"$ (3).
- ▶ Refer to the Wolf Design Guide pdf file for additional specifications.
- ▶ Dimensions in parentheses are in millimeters unless otherwise specified.

PRE-INSTALLATION DIMENSIONS


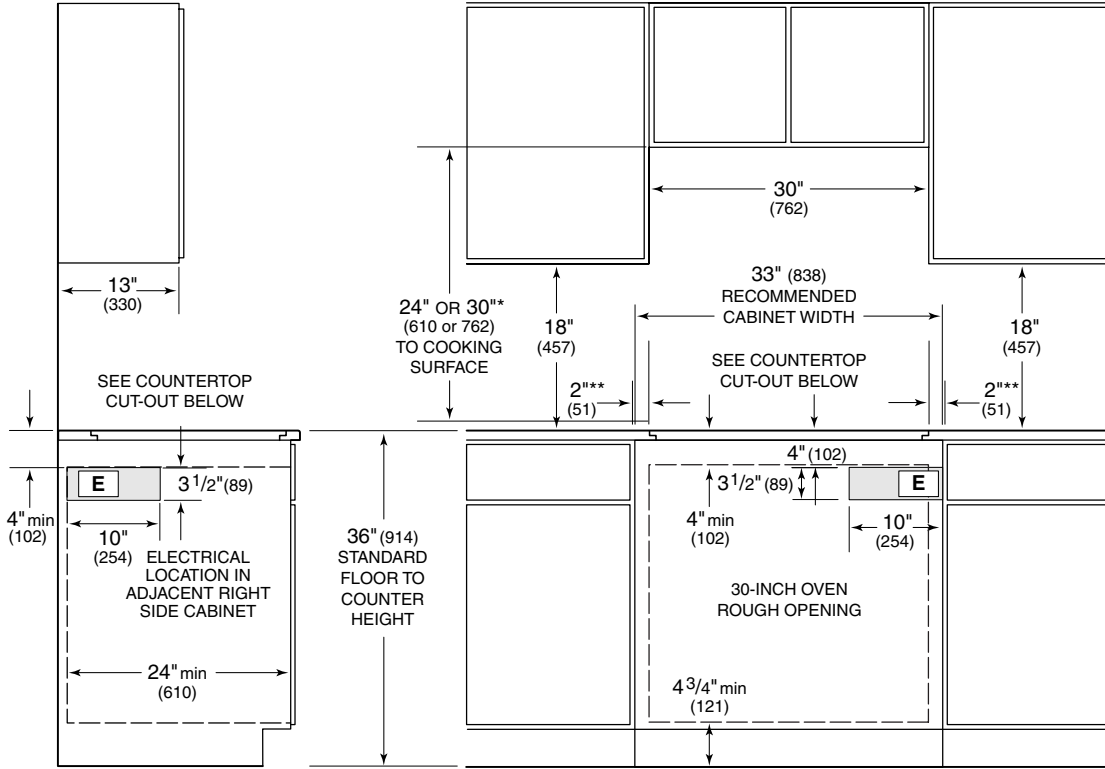


* Minimum 24" (610) from protected cabinet or 30" (762) from unprotected cabinet to cooking surface.

** Minimum clearance from side edge of cooktop cut-out to combustibile surface up to 18" (457) above cooking surface.

▶ Countertop Cut-out

RECESSED AREA FOR FLUSH MOUNT INSTALLATION ONLY

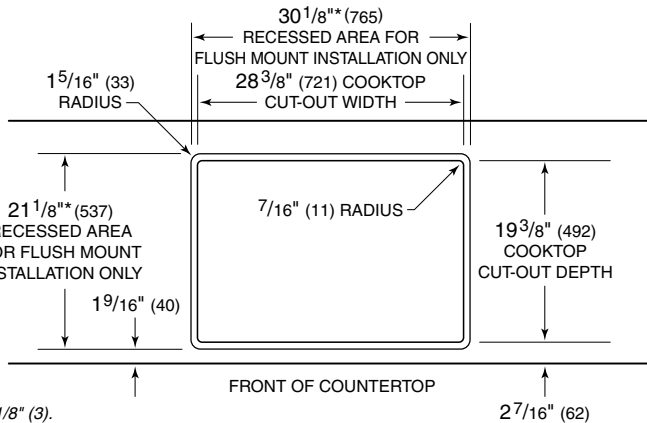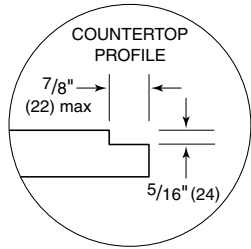

* Minimum dimension, but may be exceeded by up to 1/8" (3).

▶ Dimensions may vary by ± 1/8" (3).

▶ Refer to the Wolf Design Guide pdf file for additional specifications.

Unframed

- ▶ The Wolf 30" (762) unframed electric cooktop can be mounted flush with the countertop or installed as a frameless application. In either installation the cooktop cut-out dimensions are the same. If it is to be mounted flush with the countertop, you will need to provide a recessed area surrounding the cooktop cut-out. Refer to the Pre-Installation Dimensions illustration.
- ▶ If the cooktop is to be mounted flush with the countertop, fabrication of the recessed area must take place before the final countertop installation.
- ▶ Wolf recommends using 33" (838) cabinets with the 30" (762) cooktop.
- ▶ A Wolf single 30" (762) built-in oven may be installed below this cooktop. Refer to the illustration for specifics on cut-out dimensions and placement of electrical. Be aware of the depth of the cooktop when planning for this installation.

- ▶ Wolf electric cooktops are designed and agency approved for installation with Wolf built-in ovens only. The cooktop nominal width must match the built-in oven nominal width.
- ▶ The Wolf 30" (762) unframed electric cooktop requires a separate, grounded 3-wire 240V, 40 amp service with its own circuit breaker. It has a 4' (1.2 m) flexible 3-wire conduit that can make a connection at a junction box.
- ▶ You must follow all National Electrical Code regulations. In addition, be aware of local codes and ordinances when installing your service.
- ▶ A Wolf ventilation system is recommended. When installing a ventilation hood, refer to the specific requirements of the hood for the minimum dimension to cooking surface.

IMPORTANT NOTE: Wolf does not recommend the installation of a downdraft system with this cooktop.

DIMENSIONS

Cooktop Cut-Out Width	28 ³ / ₈ " (721)
Recommended Cabinet Width	33" (838)
Cooktop Cut-Out Depth	19 ³ / ₈ " (492)
Location of Electrical	Within shaded area

- ▶ See *Installation Instructions* shipped with unit for detailed specifications.
- ▶ Dimensions in parentheses are in millimeters unless otherwise specified.

Unframed

- ▶ Can be mounted flush with top of countertop or as a frameless installation
- ▶ Easy to clean black ceramic glass surface is resistance to scratching, staining, impact and heat – translucent surface allows you to see the glow of hot elements
- ▶ Illuminated touch controls with graduated control lighting
- ▶ Five ribbon-type radiant heating elements with eight temperature zones
- ▶ Triple and dual zone element radiant heaters
- ▶ True Simmer setting on all elements
- ▶ Melt setting on one element
- ▶ Hot surface indicators on all elements
- ▶ Fast power cycles eliminate long durations of on/off cycles used to control cooking temperature
- ▶ Temperature limiter to ensure that safe operating temperature of glass ceramic is never exceeded
- ▶ Child safety lock key and universal off
- ▶ Certified by Star-K to meet religious regulations
- ▶ CSA certified for US and Canada
- ▶ Two and five year residential warranty – exclusions apply, see warranty




Model CT36EU

▶ *The Wolf Model CT36EU 36" (914) unframed electric cooktop with black ceramic glass surface can be mounted flush with top of countertop or as a frameless installation.*



This appliance is certified by Star-K to meet strict religious regulations in conjunction with specific instructions found on www.star-k.org.

▶ **Model CT36EU**

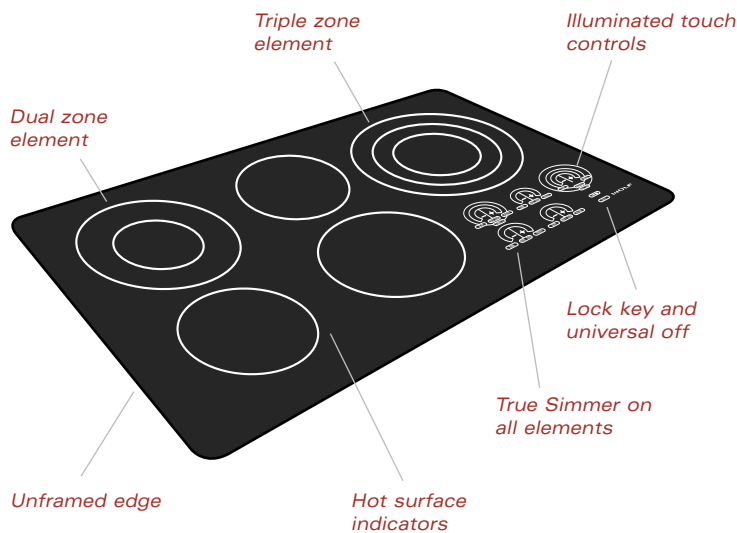

▶ *Dimensions in parentheses are in millimeters unless otherwise specified.*

Unframed

- ▶ The Wolf 36" (914) unframed electric cooktop can be mounted flush with the countertop or installed as a frameless application.
- ▶ Please follow the dimensions shown in the Pre-Installation Dimensions illustration.
- ▶ Refer to the Wolf Design Guide pdf file for detailed specifications.

SPECIFICATIONS

Overall Cooktop Width	36" (914)
Overall Cooktop Height	4" (102)
Overall Cooktop Depth	21" (533)
Cooktop Cut-out Width	34 ³ / ₈ " (873)
Cooktop Cut-out Depth	19 ³ / ₈ " (492)
Minimum Cabinet Depth	22 ³ / ₄ " (578)

Five Heating Elements with Eight Zones

Triple zone element power (max) -
2,700W outer / 2,200W middle / 1,050W inner


Dual zone element power (max) -
2,200W outer / 750W inner

Three single zone elements power (max) -
1,800W, 1,500W and 1,200W

Electrical Supply Requirements	240 V AC, 60 Hz, 50 amp dedicated circuit
Conduit	4 ft (1.2 m) flexible 3-wire
Total Connected Load	9.4 Kw at 240 V 7.1 Kw at 208 V
Shipping Weight	60 lbs (27 kg)
Special Note	Wolf does not recommend the installation of a downdraft system with this cooktop

- ▶ *Specifications are subject to change without notice*

OVERALL DIMENSIONS

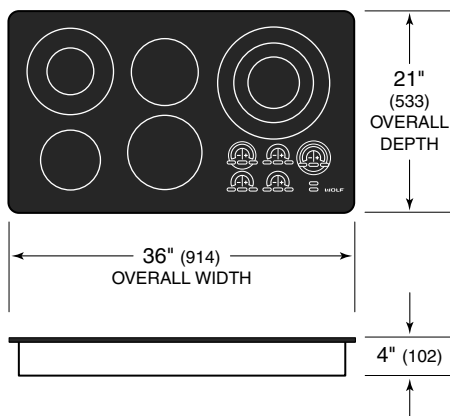

- ▶ *Dimensions may vary by ± 1/8" (3).*
- ▶ *Refer to the Wolf Design Guide pdf file for additional specifications.*
- ▶ *Dimensions in parentheses are in millimeters unless otherwise specified.*

Unframed

- ▶ The Wolf 36" (914) unframed electric cooktop can be mounted flush with the countertop or installed as a frameless application. In either installation the cooktop cut-out dimensions are the same. If it is to be mounted flush with the countertop, you will need to provide a recessed area surrounding the cooktop cut-out. Refer to the Pre-Installation Dimensions illustration.
- ▶ If the cooktop is to be mounted flush with the countertop, fabrication of the recessed area must take place before the final countertop installation.
- ▶ Wolf recommends using 39" (991) cabinets with the 36" (914) cooktop.
- ▶ A Wolf single 36" (914) built-in oven may be installed below this cooktop. Refer to the illustration for specifics on cut-out dimensions and placement of electrical. Be aware of the depth of the cooktop when planning for this installation.
- ▶ Wolf electric cooktops are designed and agency approved for installation with Wolf built-in ovens only. The cooktop nominal width must match the built-in oven nominal width.

- ▶ When a 36" (914) oven is installed below a cooktop, it is recommended that an additional 3" (76) be added to the cabinet base to ease the use of controls and oven door.
- ▶ The Wolf 36" (914) unframed electric cooktop requires a separate, grounded 3-wire 240V, 50 amp service with its own circuit breaker. It is provided with a 4' (1.2 m) flexible 3-wire conduit that can make a connection at a junction box. Locate electrical within the shaded area shown in the Pre-Installation Dimensions illustration.
- ▶ You must follow all National Electrical Code regulations. In addition, be aware of local codes and ordinances when installing your service.
- ▶ A Wolf ventilation system is recommended. When installing a ventilation hood, refer to the specific requirements of the hood for the minimum dimension to cooking surface.

IMPORTANT NOTE: Wolf does not recommend the installation of a downdraft system with this cooktop.

DIMENSIONS

Cooktop Cut-Out Width	34 ³ / ₈ " (873)
Recommended Cabinet Width	39" (991)
Cooktop Cut-Out Depth	19 ³ / ₈ " (492)
Location of Electrical	Within shaded area

- ▶ See *Installation Instructions* shipped with unit for detailed specifications.
- ▶ Dimensions in parentheses are in millimeters unless otherwise specified.