



36" (914) Gas Rangetops


MODELS RT366 / RT364C / RT364G / RT362F




Model RT366




Model RT364C



Model RT364G



Model RT362F

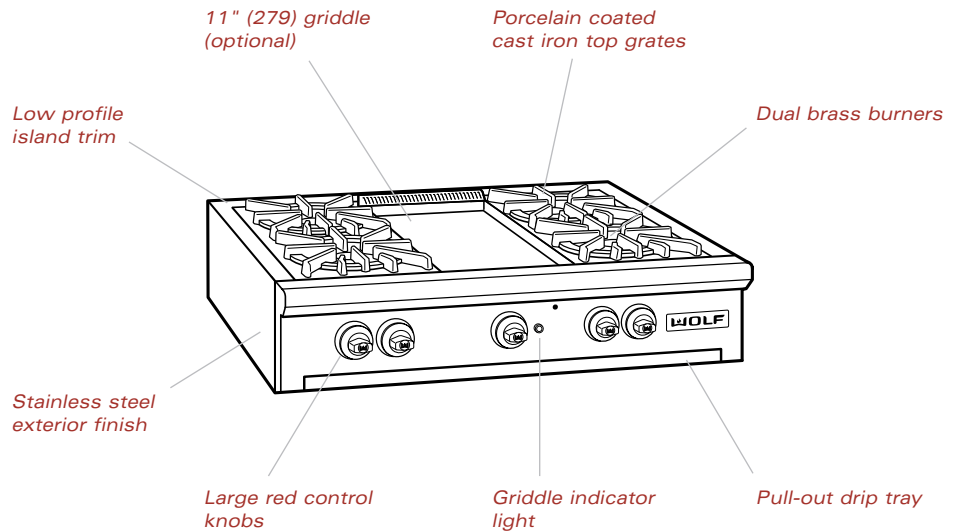

Model RT364G shown

► The Wolf 36" (914) gas rangetop is available in natural or LP gas, with your choice of four top configurations. Model numbers indicate the rangetop features; (C) charbroiler, (G) griddle and (F) French top. The model number followed by (-LP) denotes an LP gas model.



This appliance is certified by Star-K to meet strict religious regulations in conjunction with specific instructions found on www.star-k.org.

If you want to offer a more professional look to your client's kitchen and still use a cooktop, look to the gas rangetops from Wolf. They offer you that commercial look but give you flexibility to use the ovens in other locations in the kitchen. In fact, the Wolf framed ovens would be a beautiful complement to these cooking instruments.

Let Wolf, the corporate companion and kitchen soul mate of Sub-Zero, fuel your passion for cooking and kitchen design.


36" (914) Gas Rangetops

MODELS RT366 / RT364C / RT364G / RT362F

FEATURES

- ▶ Natural or LP gas models
- ▶ Classic stainless steel exterior finish
- ▶ Fits standard 24" (610) deep cabinets with zero clearance for easy installation
- ▶ Optional infrared charbroiler, infrared griddle or French top configurations
- ▶ Dual brass burners with automatic reignition at all settings, 500 Btu/hr (.1 kWh) simmer to 16,000 Btu/hr (4.7 kWh) high
- ▶ Porcelain coated cast iron top grates
- ▶ Large red control knobs with four position settings and chrome bezels - optional black knobs available at no cost
- ▶ Stainless steel drip tray on ball bearing slides
- ▶ Low profile classic stainless steel island trim
- ▶ Certified by Star-K to meet religious regulations
- ▶ CSA certified for US and Canada
- ▶ Two and five year residential warranty - exclusions apply, see warranty at the end of this guide

OVERALL DIMENSIONS ▼

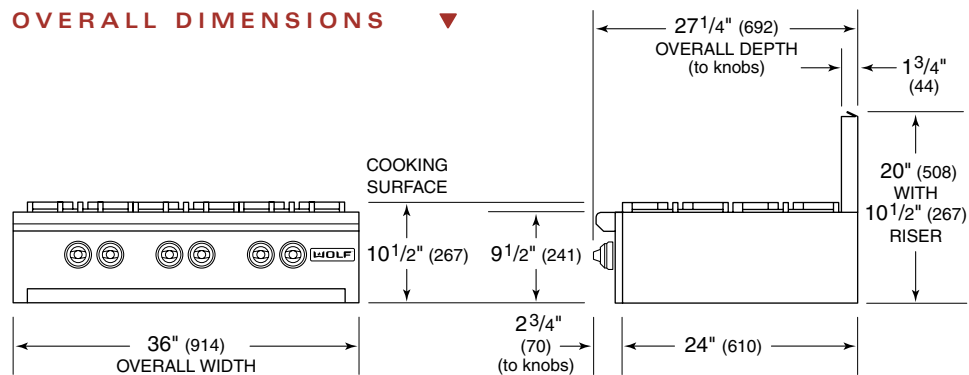

- ▶ Dimensions may vary by $\pm 1/8"$ (3).
- ▶ Dimensions in parentheses are in millimeters unless otherwise specified.

36" (914) Gas Rangetops

MODELS RT366 / RT364C / RT364G / RT362F

MODEL OPTIONS ▼

Six Burners	RT366
Four Burners w/Charbroiler	RT364C
Four Burners w/Griddle	RT364G
Two Burners w/French Top	RT362F

Natural gas models listed, for LP gas add (-LP) to the model number.

VENTILATION OPTIONS

- ▶ 36" (914) Pro Series Wall Hood
- ▶ 42" (1067) Pro Series Island Hood

Refer to the Wolf Pro Series Ventilation section for additional information.

ACCESSORIES

- ▶ 10¹/₂" (267) stainless steel riser
- ▶ Stainless steel island trim
- ▶ Black control knobs
- ▶ Porcelain cast wok grate
- ▶ Porcelain cast S-grates
- ▶ Hardwood cutting board
- ▶ LP and natural gas conversion kits
- ▶ High altitude conversion kit

Contact your Wolf dealer for additional information on accessories.

SPECIFICATIONS ▼


Overall Rangetop Width	36" (914)
Overall Rangetop Height (to cooking surface)	10 ¹ / ₂ " (267)
Overall Rangetop Depth	27 ¹ / ₄ " (692)
Surface Burners	
Top burners with 500 Btu/hr (.1 kWh) simmer to 16,000 Btu/hr (4.7 kWh) high	
11" (279) Charbroiler	16,000 Btu/hr (4.7 kWh)
11" (279) Griddle	18,000 Btu/hr (5.3 kWh)
22" (559) French Top	15,000 Btu/hr (4.4 kWh)
Electrical Supply Requirements	110/120 V AC, 60 Hz, 15 amp dedicated circuit
Power Cord	6' (1.8 m) power cord with 3-prong grounded plug
Shipping Weight	190 lbs (86 kg) - 220 lbs (100 kg)

- ▶ *Specifications are subject to change without notice.*

▶ *Dimensions in parentheses are in millimeters unless otherwise specified.*

36" (914) Gas Rangetops

INSTALLATION

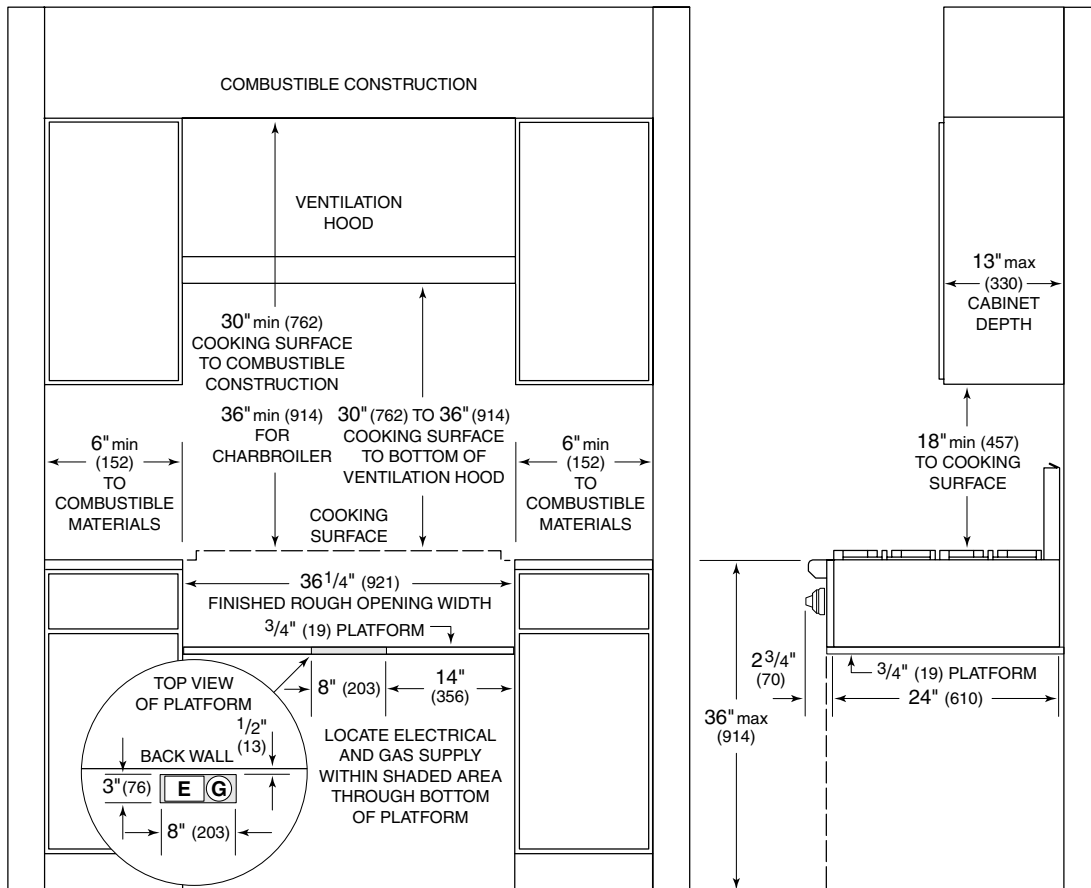

ISLAND INSTALLATIONS: 12" (305) MINIMUM CLEARANCE FROM BACK OF RANGE TO COMBUSTIBLE MATERIALS – 0" (0) TO NON-COMBUSTIBLE MATERIALS – NO SIDE WALL OR REAR WALL ABOVE COOKING SURFACE
 PENINSULA INSTALLATIONS: NO SIDE WALL ABOVE COOKING SURFACE

- ▶ Dimensions may vary by $\pm 1/8"$ (3).
- ▶ Dimensions in parentheses are in millimeters unless otherwise specified.

DIMENSIONS

Overall Width of Rangetop	36" (914)
Finished Rough Opening Width	36 1/4" (921)
Location of Electrical and Gas Supply	Within shaded area

- ▶ See Installation Instructions shipped with unit for detailed specifications.

36" (914) Gas Rangetops

INSTALLATION

INSTALLATION NOTES

- ▶ Caution must be used in planning the proper installation of the Wolf gas rangetop to avoid any fires or damage to adjacent cabinetry or kitchen equipment. Please follow the minimum clearances established in the finished rough opening dimensions as shown in the installation illustration.
- ▶ It is recommended that you use a Wolf Pro Series wall or island ventilation hood with the Wolf gas rangetop. Refer to the **Pro Series Ventilation** section and the Pro Series ventilation charts in the **General Applications** section for specifics.
- ▶ Wolf gas rangetops are designed to operate on natural gas at 5" (127) WC (water column) pressure or LP gas at 10" (254) WC pressure. The maximum gas supply pressure to the regulator should never exceed 14" (356) WC; .5 psi (3.5 kPa).
- ▶ Wolf recommends the use of a 1/2" (13) I.D. commercial type flex hose; this is the minimum size that may be used. All plumbing to the flex hose **MUST** be 3/4" (19) minimum I.D. pipe.
- ▶ A separate external gas shut-off valve must be located near the rangetop in an accessible location.
- ▶ The Wolf gas rangetop functions up to 6,000' (1828 m) in altitude without any adjustment. If the installation is above 6,000' (1828 m), contact your Wolf dealer.
- ▶ The Wolf gas rangetop requires a 110/120V electrical supply to operate the electronic ignition system. The 6' (1.8 m) power supply cord provided with the rangetop is equipped with a 3-prong, grounded plug for protection against shock hazard. The service should have its own 15 amp circuit breaker.
- ▶ A ground fault circuit interrupter (GFCI) is not recommended and may cause interruption of operation.
- ▶ You must follow all National Electrical Code and gas regulations. In addition, be aware of local codes and ordinances when installing your services.
- ▶ Refer to the installation instructions shipped with each Wolf product for detailed specifications.

▶ *Dimensions in parentheses are in millimeters unless otherwise specified.*